


STRIP-IT





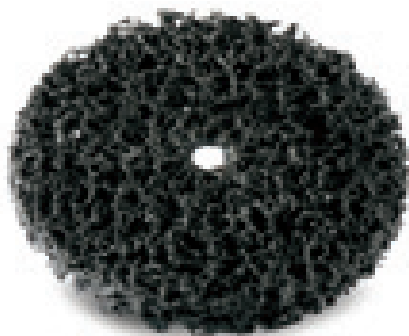


STW

STRIP-IT wheels with hole

This STRIP-IT material is cut in the shape of a disc with a hole in the centre. They can be fit individually or in pairs on suitable fixing shafts.




diam/th/hole					Suggested shaft (page 100)
50x13x6	16.000	12.000	10	STW010	single O0Y42 double O0Y42
76x13x6	10.500	8.000	10	STW001	single O0Y42 double O0Y42
100x13x13	8.000	6.000	10	STW002 •	single O0Y40 double O0Y41
115x13x13	6.900	5.000	10	STW008 •	single O0Y40 double O0Y41
125x13x13	6.400	4.900	10	STW003 •	single O0Y40 double O0Y41
150x13x13	5.350	4.100	10	STW004 •	single O0Y40 double O0Y41
178x13x13	4.500	3.450	10	STW007 •	single O0Y41 double O0Y41
200x13x13	4.000	3.050	10	STW005 •	single O0Y41 double O0Y41
200x13x16	4.000	3.050	10	STW006 •	single O0Y41 double O0Y41



SDR

STRIP-IT discs with fiberglass backing

This STRIP-IT material is applied on a stiff fiber backing thus allowing it to be used on angle grinders.




diam/hole				
100x16	12.400	9.900	10	SDR800 •
115x22	11.000	8.600	10	SDR801 •
127x22	9.800	7.800	10	SDR802 •
178x22	7.000	5.600	10	SDR803 •

SSW

STRIP-IT shaft-mounted wheels

This STRIP-IT material is cut in the shape of a disc mounted on a pre-assembled 6 or 8 mm shaft.






diam/th/shaft				
76x13x6	10.500	8.000	10	SSW122 •
100x13x6	8.000	6.000	10	SSW100 •
150x13x8	5.350	4.100	10	SSW102 •



SDF

STRIP-IT discs with flexible fiber backing

This STRIP-IT material is applied to a flexible fiber backing which allows it to be used on angle grinders with suitable backup pads.



diam/hole					Back up Pad (page 100)
115x22	10.000	8.300	10	SDF501 •	BA0001
178x22	6.500	5.400	10	SDF502 •	BA0003



SDC


STRIP-IT quick change discs

This STRIP-IT material is cut in the shape of a disc and stuck to the nylon threaded shaft.

diameter				Holder (page 100)
51	10.500	10	SDC601 •	RH0052
76	7.000	10	SDC602 •	RH0053

STRIP-IT RED

The STRIP-IT RED material is more rigid with faster cut and longer life compared to the black one.

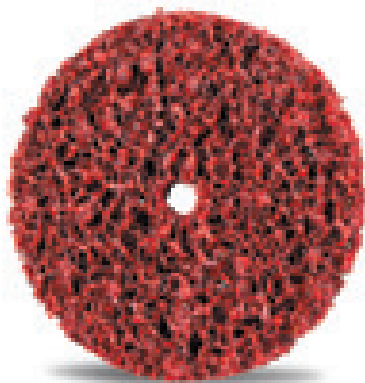

STWR

STRIP-IT RED wheels with hole

diam/th/hole	max	rpm			Suggested shaft (page 100)
100x13x13	8.000	6.000	10	STWR02 •	single O0Y40 double O0Y41
150x13x13	5.350	4.100	10	STWR04 •	single O0Y40 double O0Y41

SDRR

STRIP-IT RED discs with fiberglass backing



diam/hole	max	rpm		
115x22	11.000	8.600	10	SDRR01 •
127x22	9.800	7.800	10	SDRR02 •
178x22	7.000	5.600	10	SDRR03 •

SSWR

STRIP-IT RED shaft-mounted wheels



diam/th/shaft	max	rpm		
76x13x6	8.000	6.000	10	SSWR22 •
100x13x6	8.000	6.000	10	SSWR00 •
150x13x8	5.350	4.100	10	SSWR02 •



SDCR

STRIP-IT RED quick change discs

diameter	max			Holder (page 100)
51	10.500	10	SDCR01 •	RH0052
76	7.000	10	SDCR02 •	RH0053